

# uniSwitch

## Softswitch


### KEY FEATURES

- Multiple Routing Mechanisms
- Topology Hiding
- SIP/H.323 Protocol Conversion
- Proxy Mode Support
- Routed Mode Support
- Routed Mode w/o H.245 Support
- Static Mode Support
- High Scalability
- ASR Route Switching
- Route Fail-over Support
- Universal Connectivity


### Product Overview

uniSwitch is a robust and scalable VoIP softswitch which provides secure and reliable peering between VoIP networks. The product serves as a single point of entry into any VoIP infrastructure, offering centralized authentication, flexible routing and enhanced network security. With uniSwitch Softswitch, service providers benefit from improved call completion rates, higher revenues, less revenue leakage, and improved network security and availability.

### UNISWITCH SOFTSWITCH

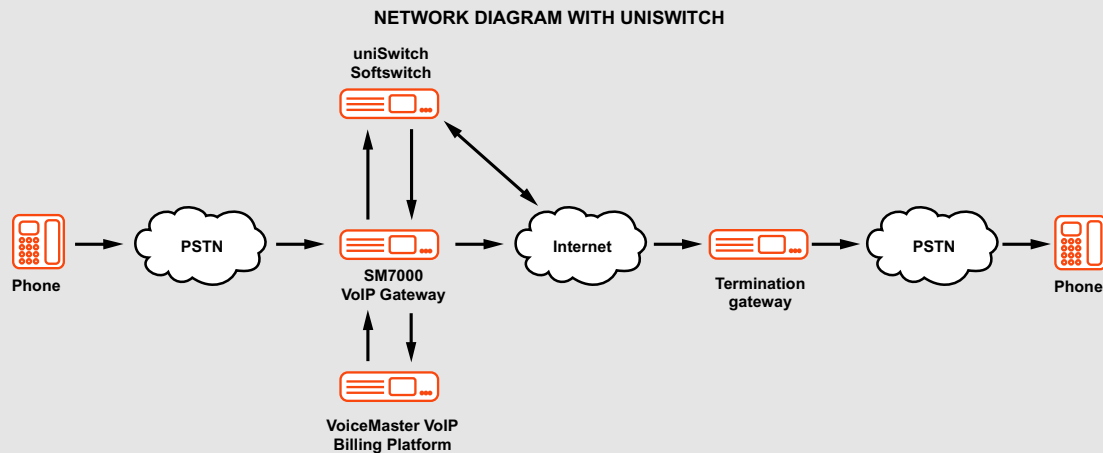

### UNISWITCH PRODUCT ARCHITECTURE

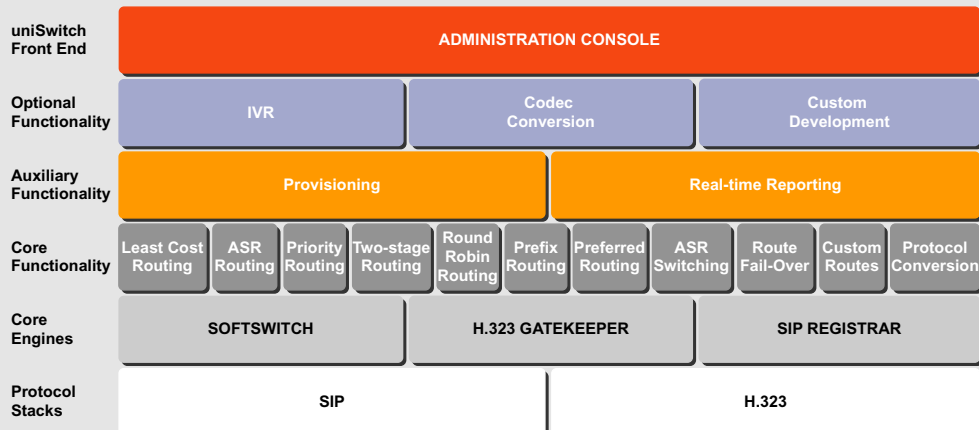

# uniSwitch

## Softswitch

### Multiple Routing Mechanisms

uniSwitch Softswitch supports multiple routing mechanisms, including Least Cost Routing, ASR Routing, Priority Routing, Two-stage Routing, Preferred routing, Route Fail-Over and others. By providing multiple routing options, uniSwitch enables providers to select the most profitable and high quality routes for each call and increase call completion rates, revenues and profits.

### Topology Hiding

Using uniSwitch Softswitch, providers can securely separate their VoIP networks from the outside IP world. The product can act as a traffic proxy between out-of-network VoIP terminals and in-network equipment thereby preventing outsiders from seeing the true topology of the protected network.

### SIP/H.323 Protocol Conversion

The protocol conversion functionality of uniSwitch Softswitch ensures maximum interoperability with third party VoIP equipment. The softswitch can translate signaling messages from SIP to H.323 and vice versa and thus bridge calls between VoIP equipment using incompatible protocols.

### Proxy Mode Support

uniSwitch Softswitch can operate in proxy mode in which both signaling (RAS) and voice (RTP) traffic flow through the softswitch. Such bandwidth intensive mode is suitable for establishing connections to terminals behind NAT and to terminals that want to keep their identities private. In proxy mode uniSwitch exercises full call control and can disconnect calls in progress if necessary.

### Routed Mode Support

In routed mode, uniSwitch Softswitch requires less bandwidth. In such mode the softswitch performs direct control of signaling (RAS) messages only; voice (RTP) traffic is exchanged gateway-to-gateway. In routed mode uniSwitch exercised substantial degree of call control and can disconnect calls in progress if necessary.

### Routed Mode w/o H.245 Support

This operating mode of uniSwitch Softswitch mimics Routed Mode with the difference that H.245 call signaling is handled by the participating gateways, not the softswitch. Routed Mode w/o H.245 enables uniSwitch to reduce further bandwidth utilization while still preserving substantial degree of call control.

### Static Mode Support

In static mode, both signaling (RAS) and voice (RTP) traffic are exchanged directly between participating gateways. In such mode uniSwitch Softswitch consumes least bandwidth but does not have control over calls in progress.

### High Scalability

uniSwitch Softswitch is offered in standard and carrier editions to address the capacity needs of both emerging and established telecoms and service providers. The standard edition supports up to 500 concurrent calls, whereas the carrier edition can handle up to 1,000 concurrent calls in wholesale environment.

### ASR Route Switching

uniSwitch Softswitch offers ASR route switching capabilities to ensure higher call completion rates and reduced revenue loss. The product monitors all end terminals in real-time and automatically disconnects those, whose ASR rates fall below critical values preset by system administrators.

### Route Fail-over Support

uniSwitch Softswitch offers a mechanism to ensure high network availability. The product can be configured to periodically conduct L3, L4, and L7 remote service checks and re-route (fail-over) calls to alternative remote terminals if existing ones become unavailable.

### Universal Connectivity

uniSwitch Softswitch offers a number of features to ensure universal connectivity with other VoIP terminals. In particular, the product can accept traffic from both registered and non-registered terminals and can terminate traffic to gatekeepers, gateways and softswitches.

#### Contact Info:

SysMaster Corporation  
370 N. Wiget Lane, Suite 100  
Walnut Creek, CA 94598  
United States of America

email: [info@sysmaster.com](mailto:info@sysmaster.com)  
Toll free: 1-877-900-3993  
web site: <http://www.sysmaster.com>